



NOTES:

1. ANY DEVIATION FROM THE CONDITIONS SHOWN ON THE DRAWING SHALL BE SUBMITTED TO THE ENGINEER.
2. CONTRACTOR HAS TO VERIFY ALL DIMENSIONS AND ELEVATIONS PRIOR TO COMMENCING WORK.
3. DESIGN LOAD: 5000 lbs (22.24kN) IN ANY DIRECTION.
4. MATERIALS: MASONRY BLOCKS 8" MIN.;
CORE SLAB 6" MIN. THICKNESS;
GROUT $f'_c=15$ MPa MIN.;
15M REINFORCING BARS $f'_y=400$ MPa.

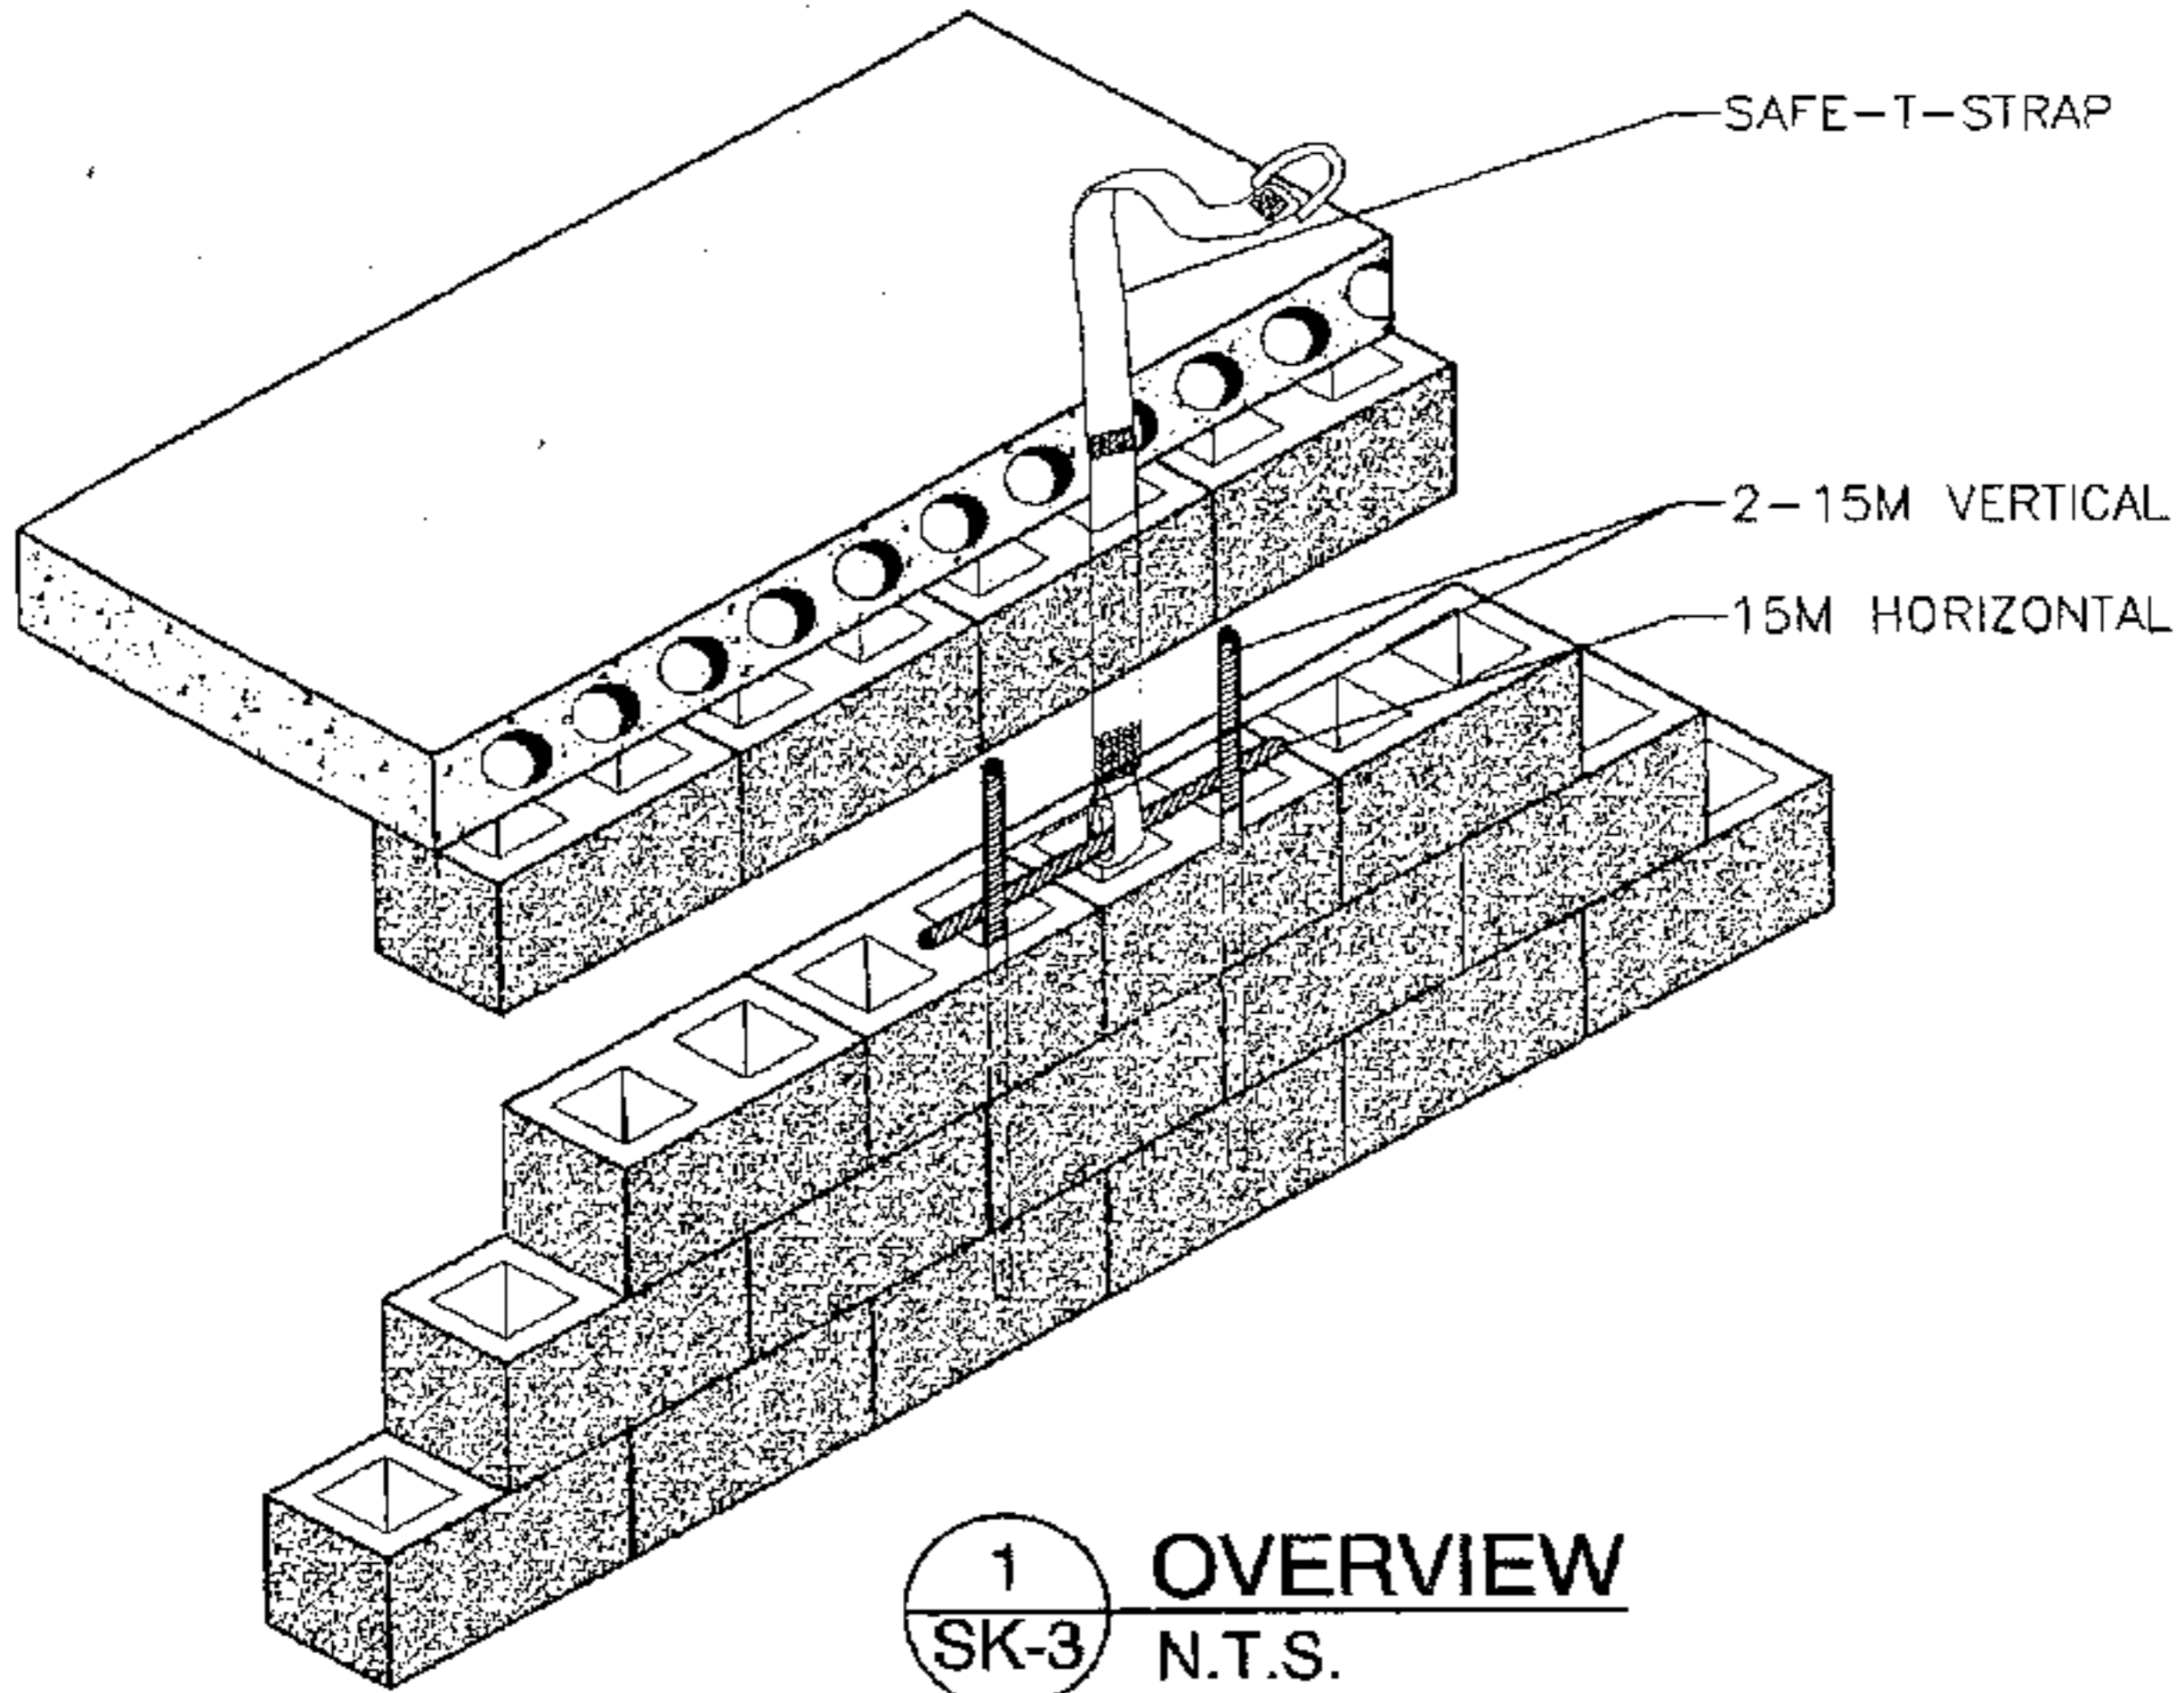


art engineering inc.
 163 Walgreen Road • Suite 203
 Carp • Ontario • K0A 1L0 • Canada
 (613) 836-0632 • Fax: (613) 836-1226
 www.artengineering.ca
 BCIN: 32320

client			SAFE-T-STRAP		
project			SAFE-T-STRAP FOR MASONRY BLOCK WALL		
date	project No.	drawing No.			
NOV. 05, 2007	0828	SK-3			

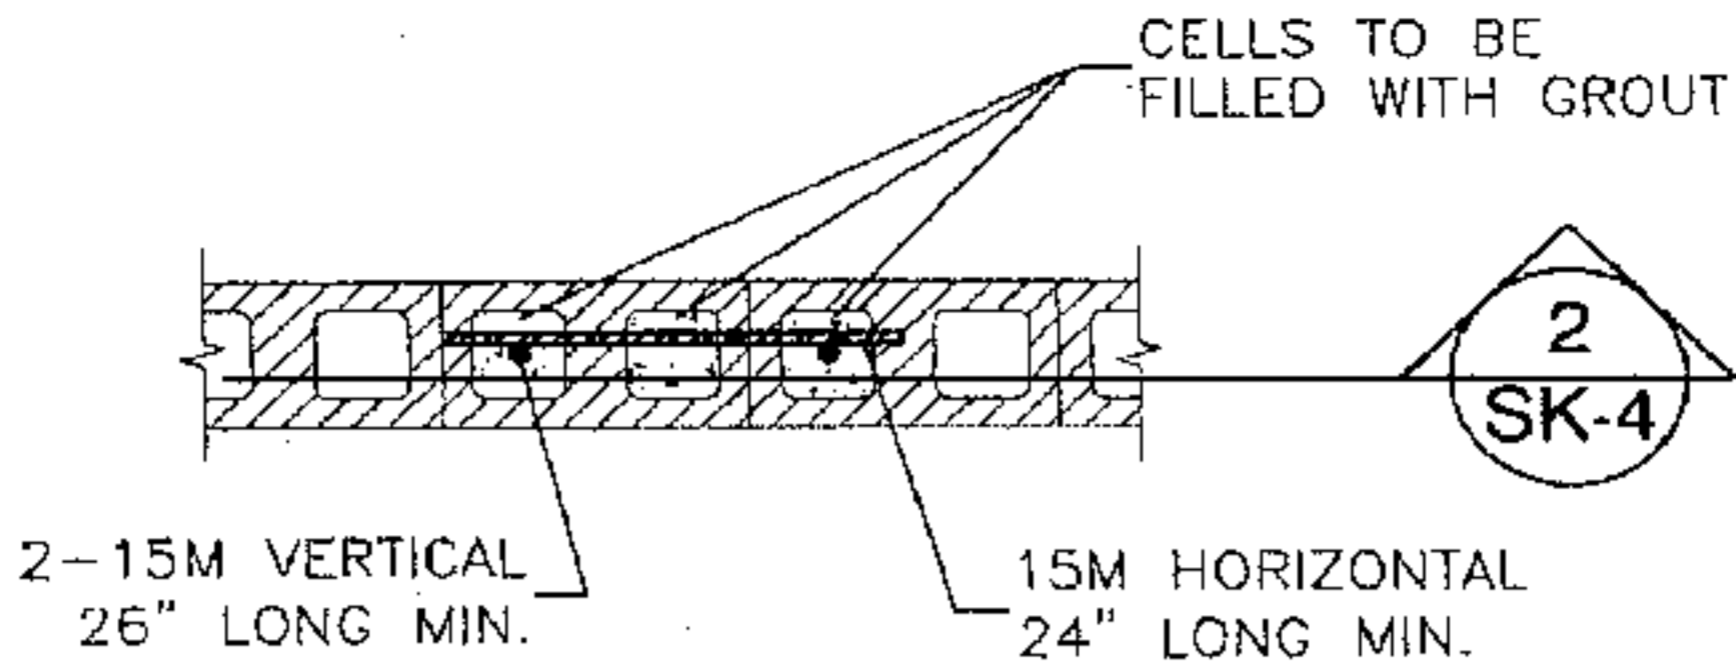

1 PLAN VIEW
SK-4 1:20

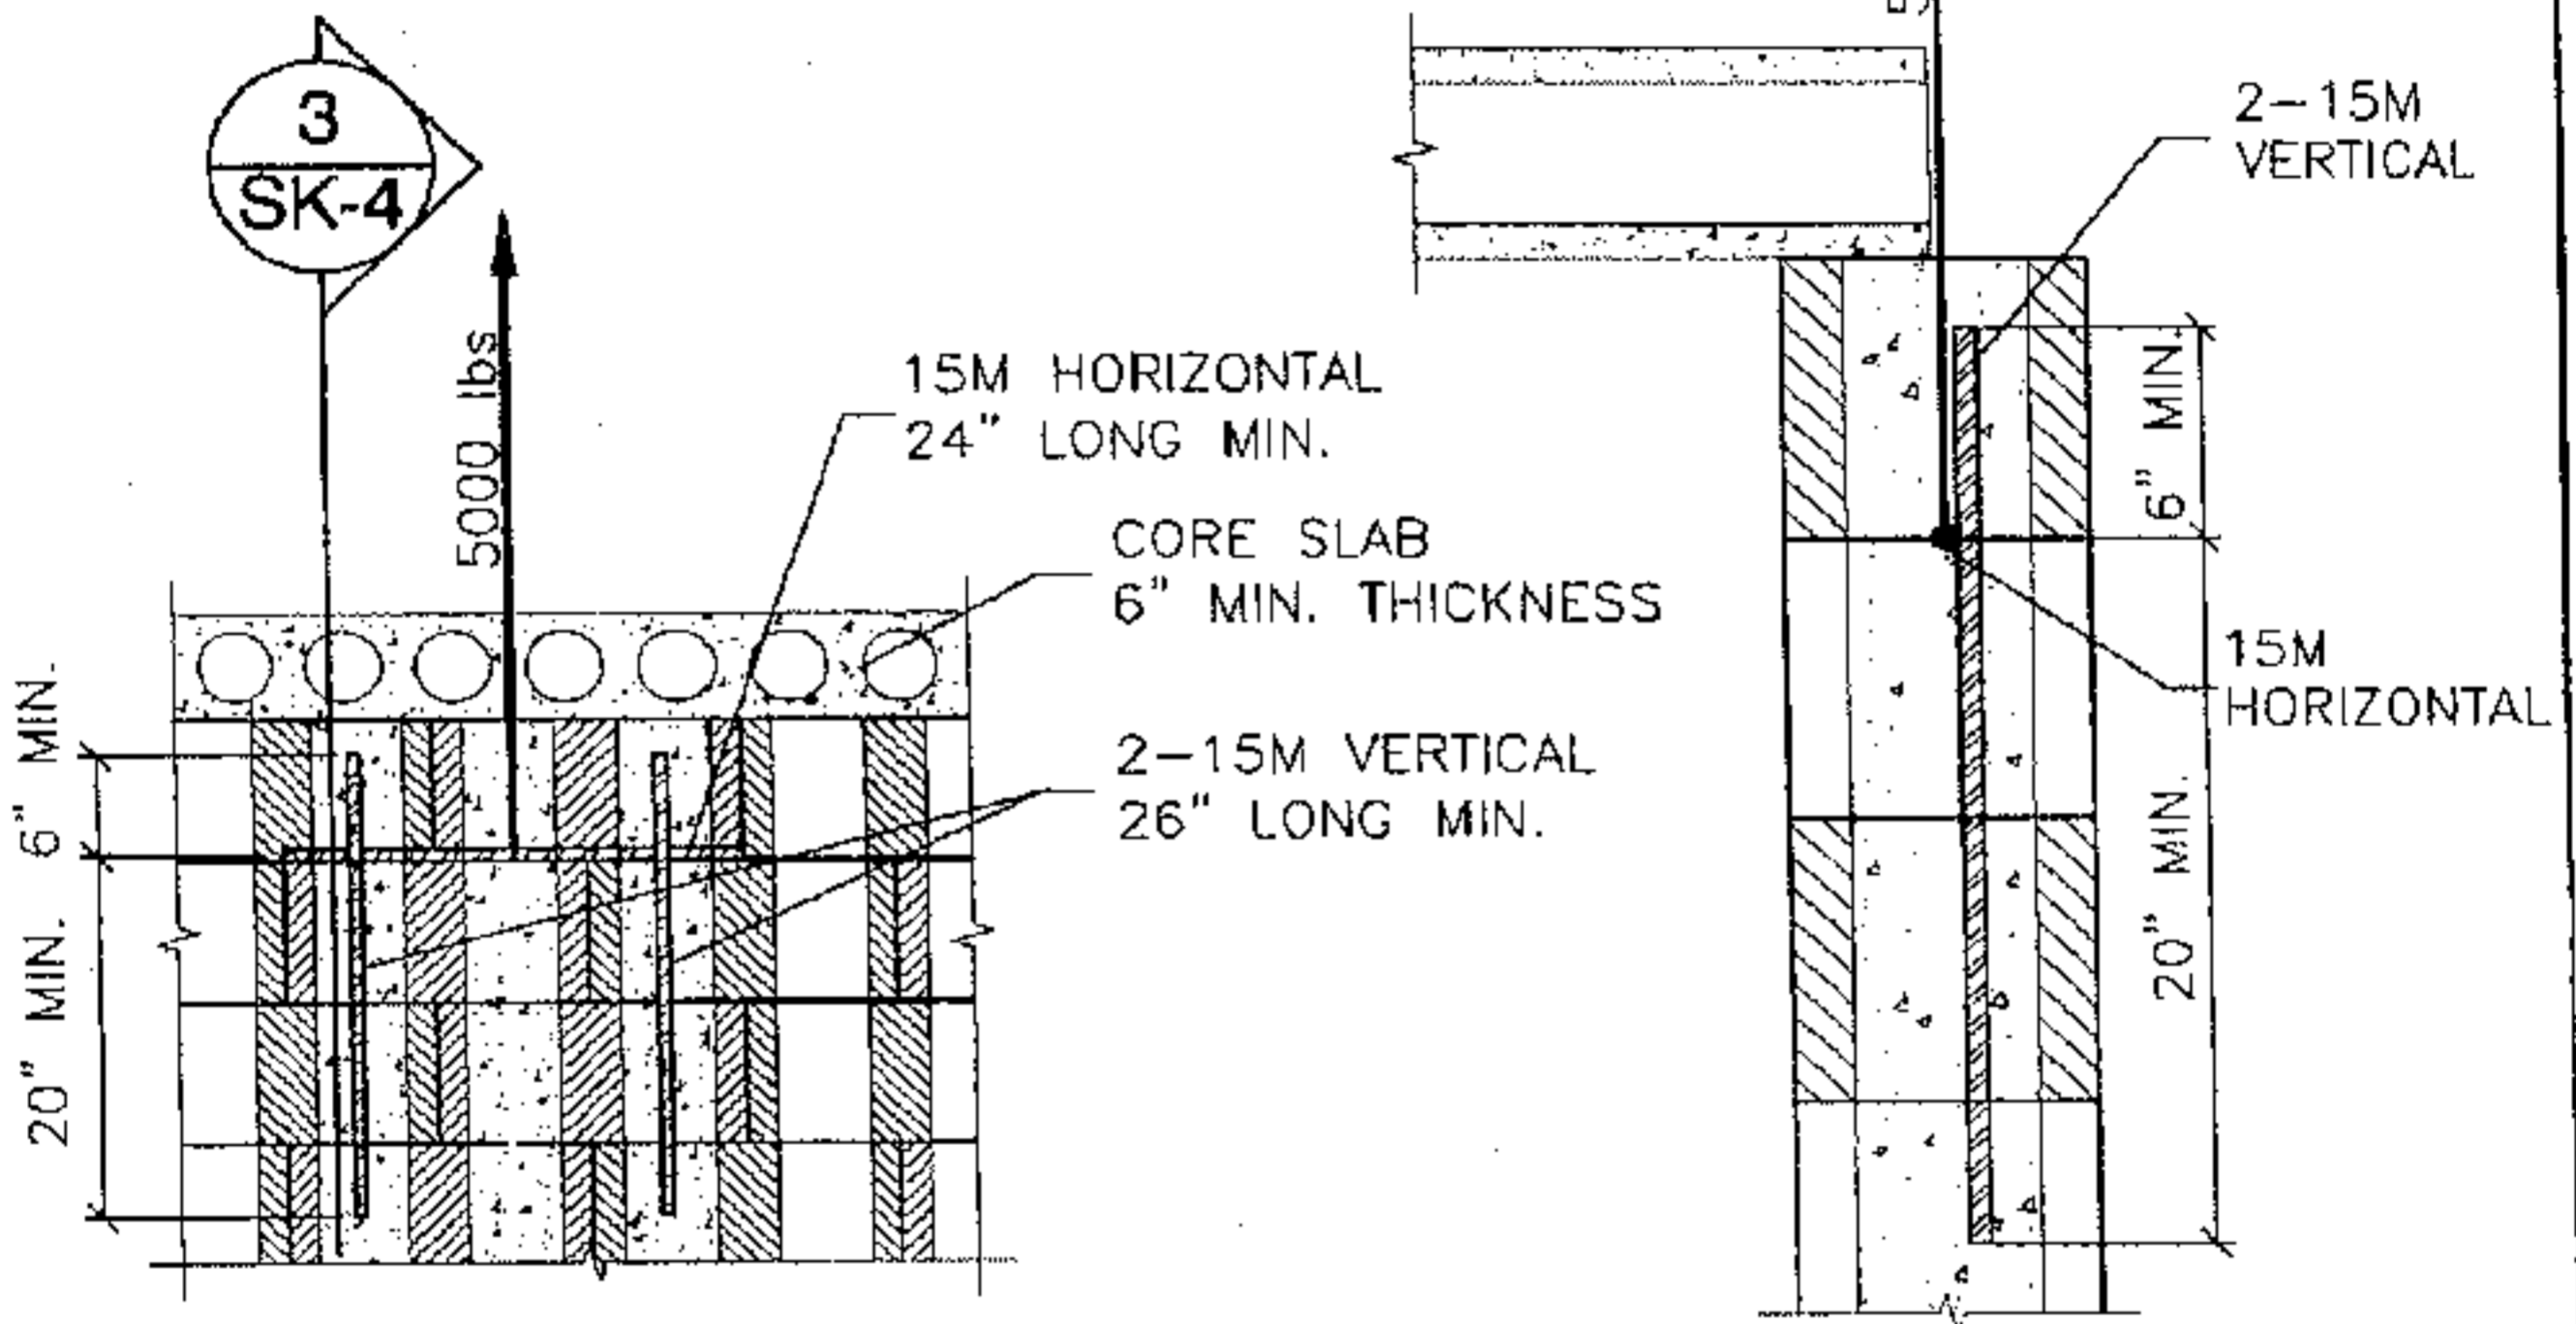

2 SECTION
SK-4 1:20

3 SECTION
SK-4 1:10



art engineering inc.
163 Walgreen Road • Suite 203
Carp • Ontario • K0A 1L0 • Canada
(613) 696-0632 • Fax: (613) 696-1226
www.artengineering.ca
BCIN: 32320

client SAFE-T-STRAP		
project SAFE-T-STRAP FOR MASONRY BLOCK WALL		
date NOV. 05, 2007	project No. 0826	drawing No. SK-4



SAFE-T-STRAP™


333 Frankcom Str., Ajax, Ontario L1S 1R4 Tel.: (905) 426-3243 Fax: (905) 426-2160

TOLL FREE: 1-800-547-4298

(In Canada and the U.S.A.)

www.safetystrap.com

- 1/ SAFE T STRAP TO BE ATTACHED TO A MINIMUM 5/8 REBAR 8" LONG
- 2/ ALL CAVITIES TO BE FILLED SOLID WITH CONCRETE
- 3/ CONCRETE MUST HAVE ACHIEVED A MINIMUM COMPRESSIVE STRENGTH OF 15 MPa BEFORE USED AS ANCHORAGE

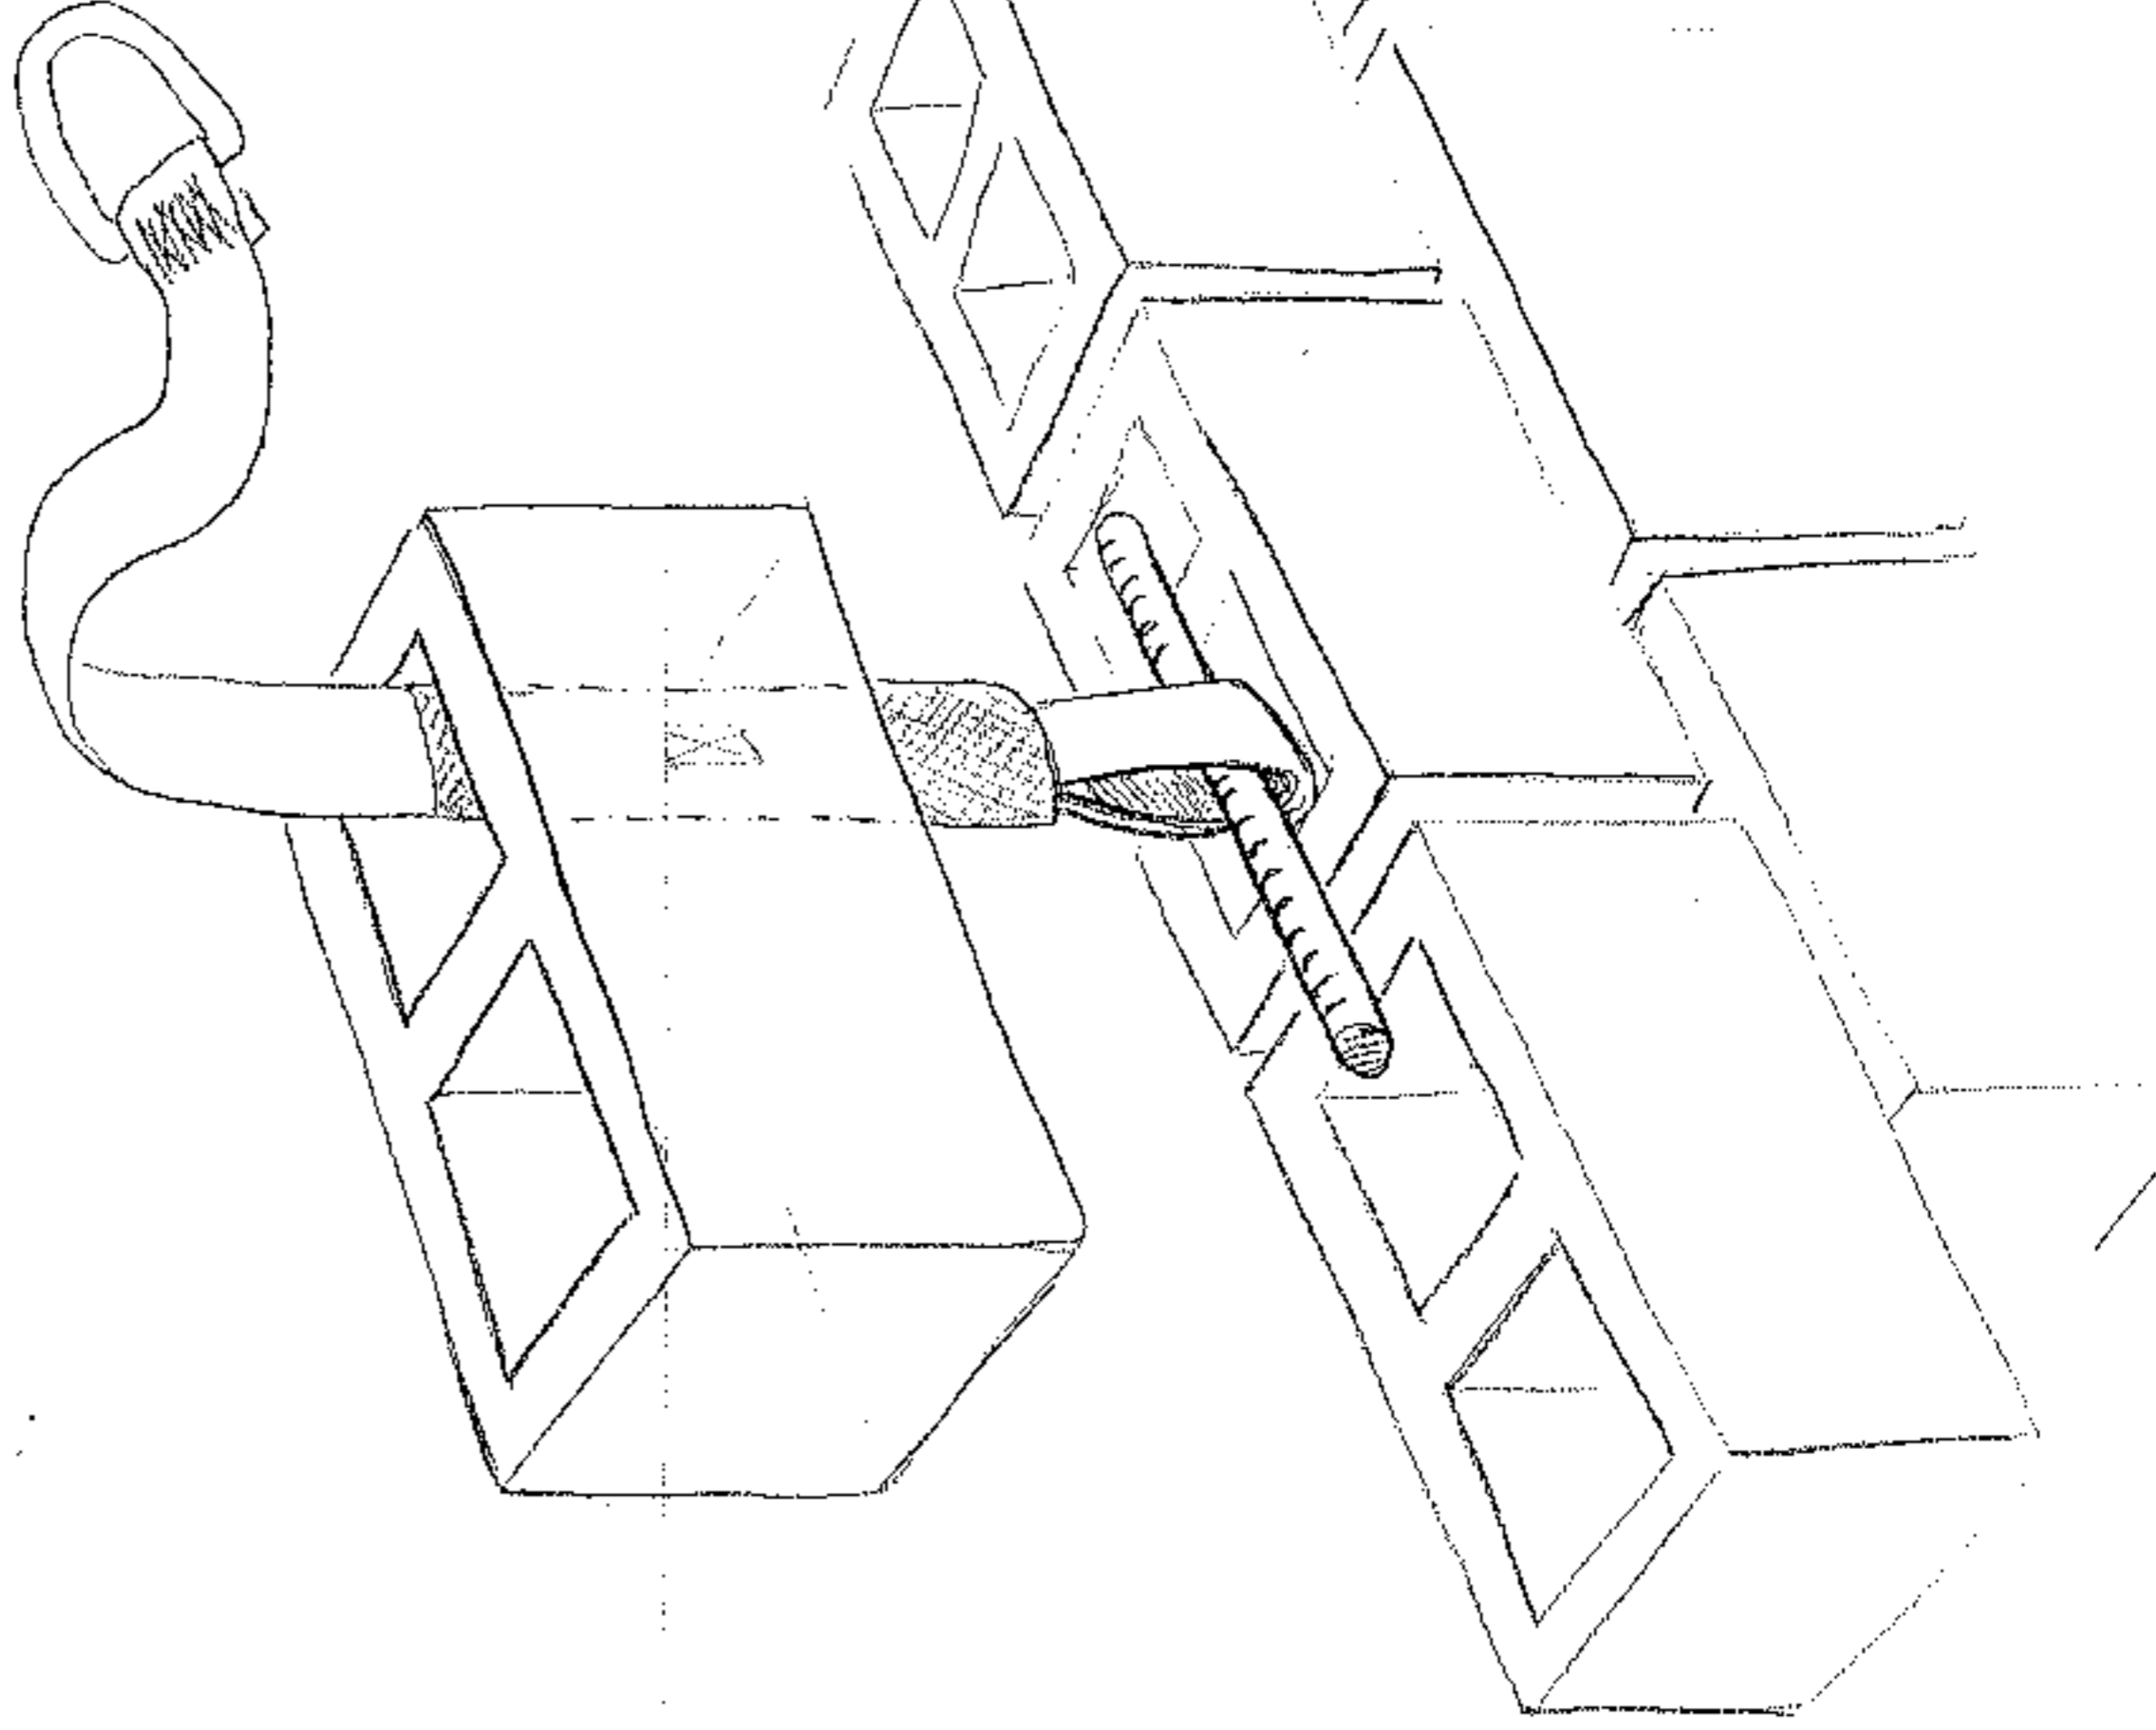




SAFE-T-STRAP™

333 Frankcom Str., Ajax, Ontario L1S 1R4 Tel.: (905) 426-3243 Fax: (905) 426-2160

www.safetystrap.com

TOLL FREE: 1-800-547-4298

(In Canada and the U.S.A.)

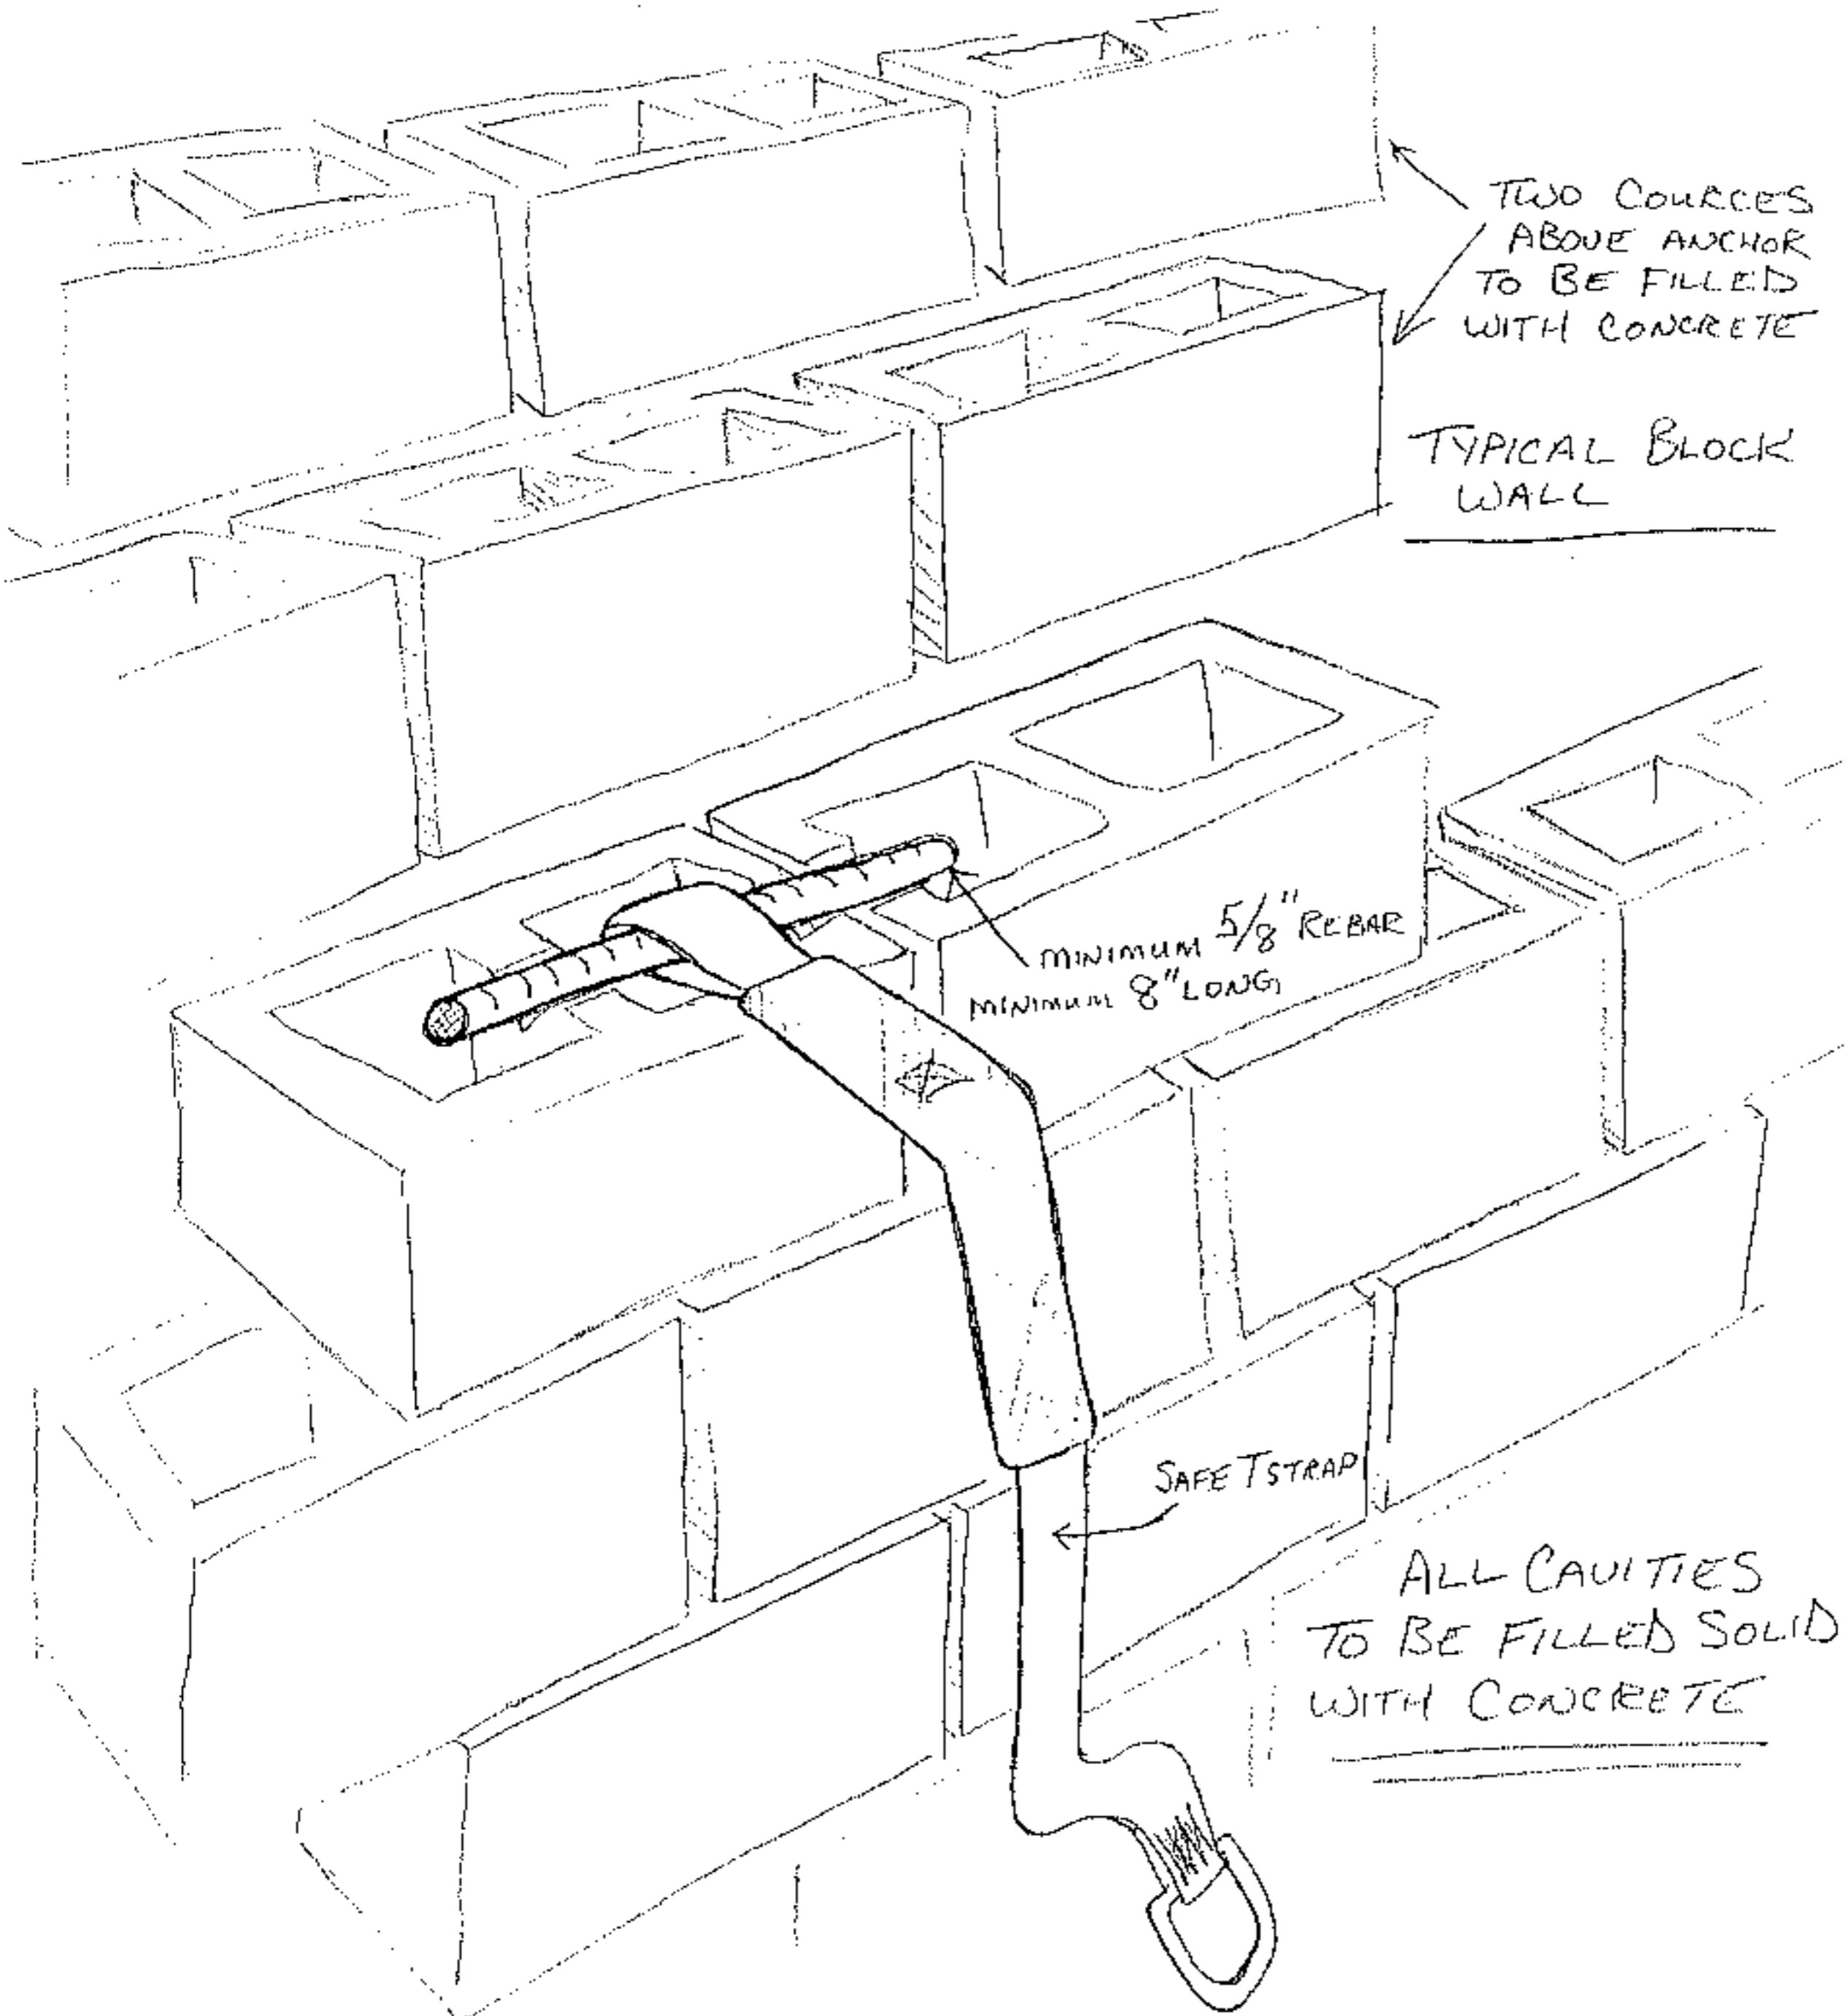

* VERTICAL DOWELS CAN ALSO BE USED PROVIDING MINIMUM ARE FOLLOWED AND WALLS ARE FILLED WITH CONCRETE