



SAFE-T-STRAP™

333 Frankcom Str., Ajax, Ontario L1S 1R4 Tel.: (905) 426-3243 Fax: (905) 426-2160

TOLL FREE: 1-800-547-4298

(In Canada and the U.S.A.)

www.safetystrap.com

HIGH-RISE FORMING INSTALLATION PROCEDURES

COPYRIGHT© 1994 SAFE-T-STRAP

ALL RIGHTS RESERVED. NO PART OF THIS PUBLICATION MAY BE REPRODUCED STORED IN A RETRIEVAL SYSTEM, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELETRONIC, MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE, WITHOUT THE PRIOR WRITTEN PERMISSION OF SAFE-T-STRAP (A DIVISION OF WEB-TECH SAFETY PRODUCTS)

WARNING!!!!

- FAILURE TO READ AND UNDESTAND THESE INSTALLATION PROCEDURES MAY RESULT IN SERIOUS INJURY OR DEATH.
- MAKE CERTAIN THAT THE SAFE-T-STRAP HAS NOT BEEN DAMAGED IN SHIPMENT PRIOR TO USE.
- THIS SAFE-T-STRAP IS AN ENGINEERED PRODUCT. IT MUST BE RETURNED TO THE ORIGINAL SUPPLIER FOR REPAIR (IF REQUIRED)
- SYNTHETIC STRAPS SHOULD NOT BE USED IN EXCESS OF 200 DEGREES FAHRENHEIT. AVOID DAMAGING FROM WELDING SPARKS AND CORROSIVE CHEMICALS.

IMPORTANT!!!!

- CAREFULLY READ AND FOLLOW ALL INSTALLATION INSTRUCTIONS AND ALL SPECIFICATIONS FOR USE OF THIS PRODUCT.
- SAFE-T-STRAP IS A NON-REUSABLE FALL-ARREST SYSTEM AND WE ASSUME NO LIABILITY CONNECTED WITH ITS RE-USE
- THE USER IS REMINDED BEFORE A SAFE-T-STRAP IS ATTACHED TO ANY MEMBER OF A PROJECT, THE MEMBER SHALL BE SO FRAMED, FASTENED, TIED AND BRACED SO AS TO PROVIDE THE REQUIRED STRENGTH AND RIGIDITY
- SAFE-T-STRAP MUST BE INSTALLED AS REQUIRED BY THE MANUFACTURER'S PROCEDURE UNDER THE SUPERVISION OF A COMPETENT PERSON TRAINED IN IT'S PROPER INSTALLATION
- THE SAFE-T-STRAP IS A COMPONENT OF A FALL-ARREST SYSTEM. LOCATION OF INDIVIDUAL STRAPS WILL VARY AND SPECIFIC PROCEDURES FOR INSTALLATION WILL BE REQUIRED TO ENSURE ADEQUATE FALL PROTECTION FOR WORKERS.





SAFE-T-STRAP™

(905) 426-3243

NOTES:

- 1) DESIGN LOAD: 22 KN
- 2) ALL STEEL REINFORCEMENT TO CSA G30.18 G400
- 3) ALL CONCRETE TO HAVE ACHIEVED A MINIMUM COMPRESSIVE STRENGTH OF 15 MPa BEFORE ANCHORAGE MAY BE USED
- 4) NOT MORE THAN ONE WORKER TO BE ATTACHED TO ANY STRAP
- 5) ANCHORS NOT TO BE INSTALLED CLOSER THAN 300 mm TO ADJACENT REBAR UNLESS USED IN OPPOSING STORES OF A WALL
- 6) ALL WORKERS TO BE EQUIPPED WITH FULL BODY HARNESSES IN ACCORDANCE WITH WCB SPEC B 118
- 7) ALL LANTARDS TO CONFORM TO WCB SPEC B 114 AND TO BE ON THE MAXIMUM SPECIFIED LENGTH OR LESS UNLESS APPROVED BY THE BOARD
- 8) ALL CARABINERS TO WCB SPEC B 120
- 9) WORKERS TO BE EQUIPPED WITH PERSONAL SHOCK ABSORBING DEVICES TO WCB SPEC B 118 WHEN ANCHORS INSTALLED BELOW 1200 mm FROM WORK SURFACE OR WHERE FREE FALL LIMITS OF 1200 mm CANNOT BE SATISFIED
- 10) ANCHOR CAPACITY IS BASED UPON ANCHORAGE CONDITIONS AND DOES PERTAIN TO OR REFLECT THE CAPACITY OF THE STRUCTURAL ELEMENT BEING CONNECTED TO.

ALL-SPAN	
ENGINEERING & CONSTRUCTION LTD	
Suite 201, 7198 Vantage Way Delta, BC V4G 1K7 Phone (604) 940-2212 Fax: (604) 940-1516	
REV	DATE
D	
C	
B	
A	
REV	DATE
DESCRIPTION	
CLIENT	SAFE-T-STRAP
PROJECT TITLE	SAFE-T-STRAP
	FALL ARREST DEVICE
DRAWING TITLE	STRAP ANCHORAGES
SCALE	DATE
NYS	76.10.22
DESIGN	PROJECT
BG	8.124
CHECKED	DATE
CM	76.10.22

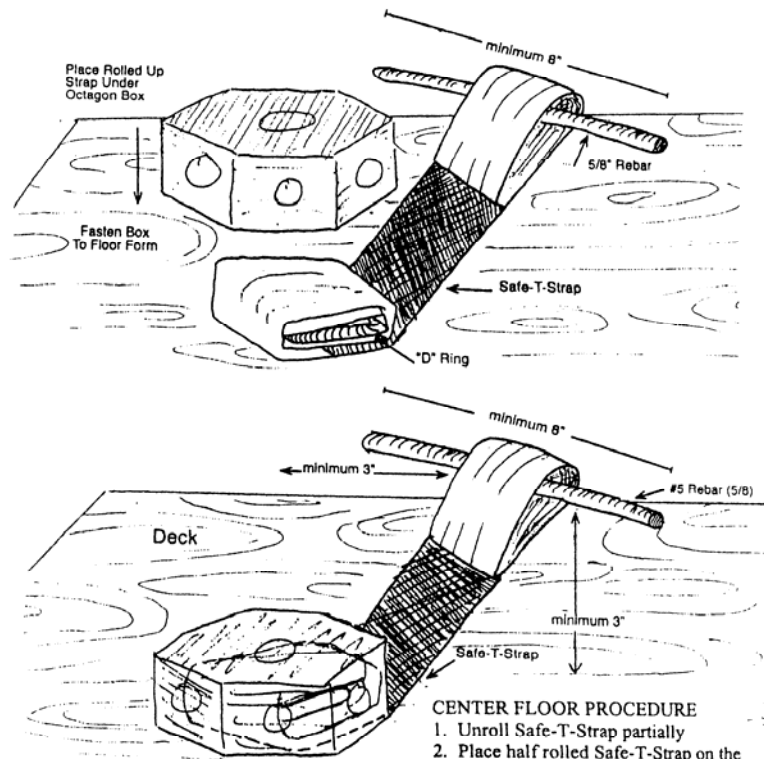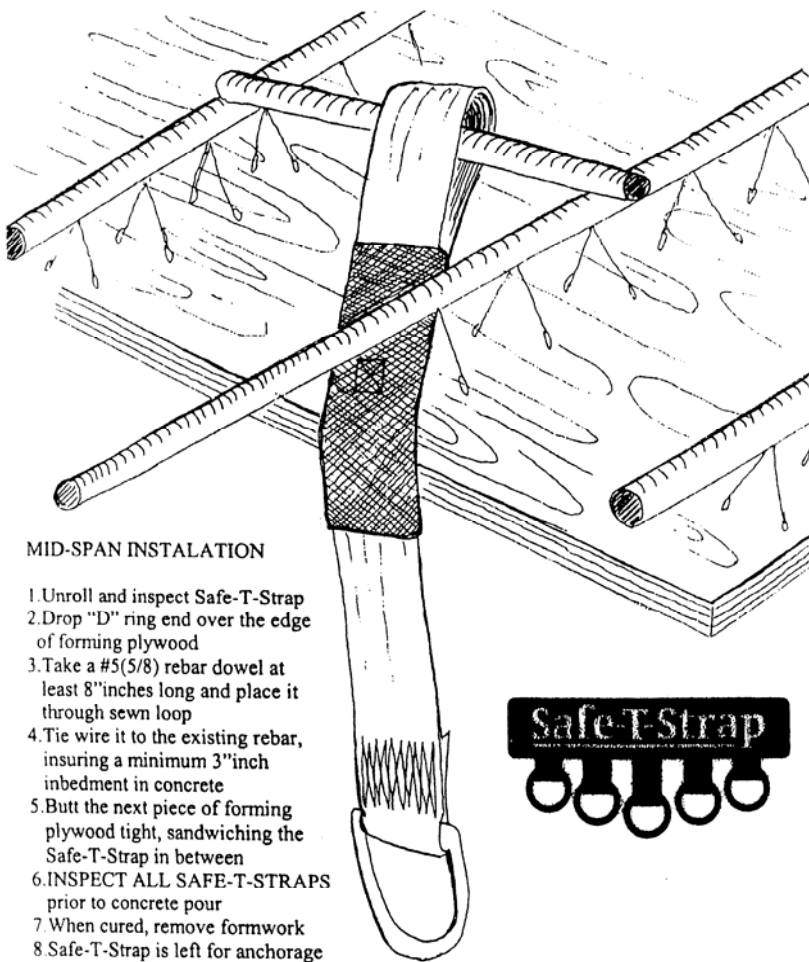

Top View

